




HYDRAULIC 4-POST LIFT

COMBI LIFT

ONE FOR ALL, ALL IN ONE

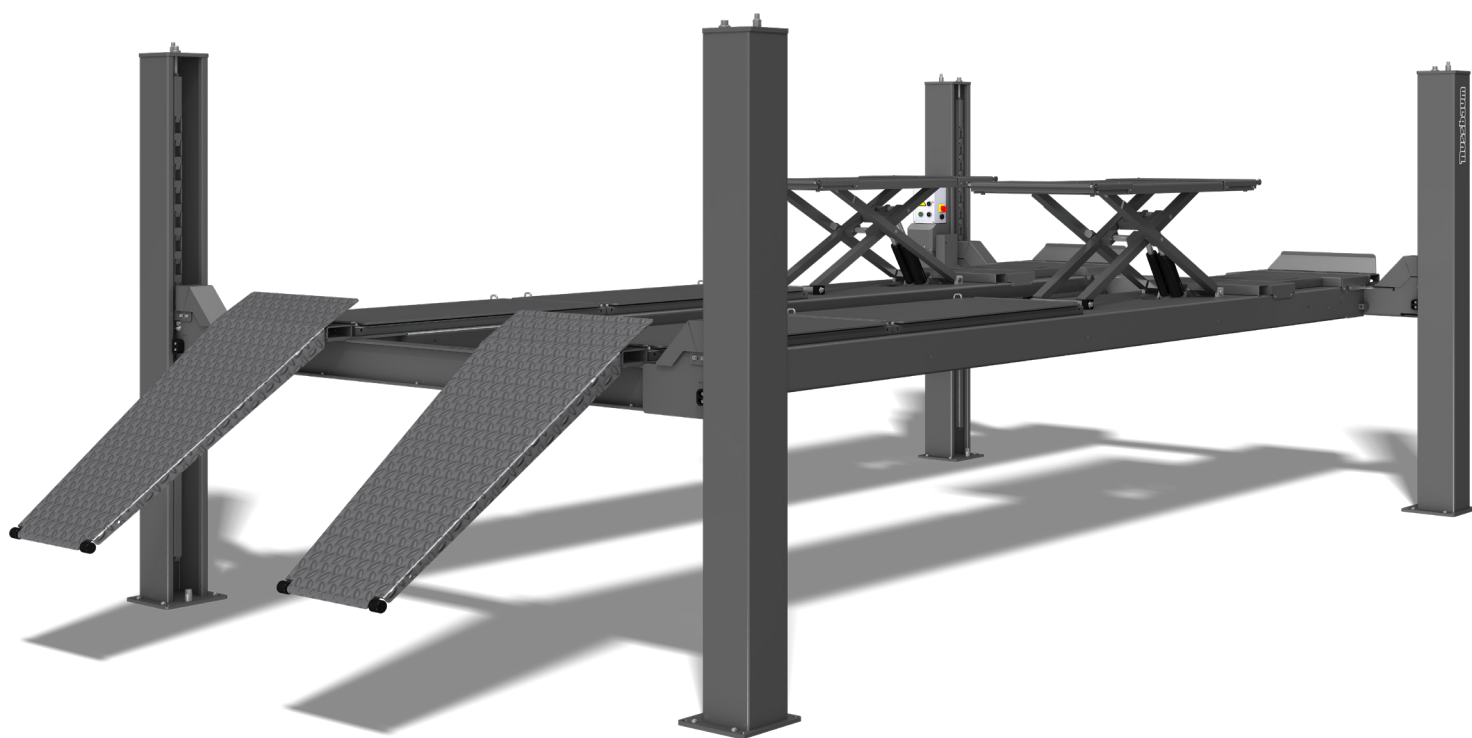

STURDY AND PRECISE

- ✓ For repair, tire service and reliable wheel alignment
- ✓ Numerous accessories available
- ✓ Flat runways with space saving ramps
- ✓ Silent oil-submerged power unit

4000 KG | 5500 KG | 6500 KG | 8000 KG



HYDRAULIC 4-POST LIFT


COMBI LIFT

A lift that will suit all your needs

You want to make repairs, wheel alignment, or tire service?

You want a lift that can have it all?

The COMBI LIFT exists in different versions and one is made for you.

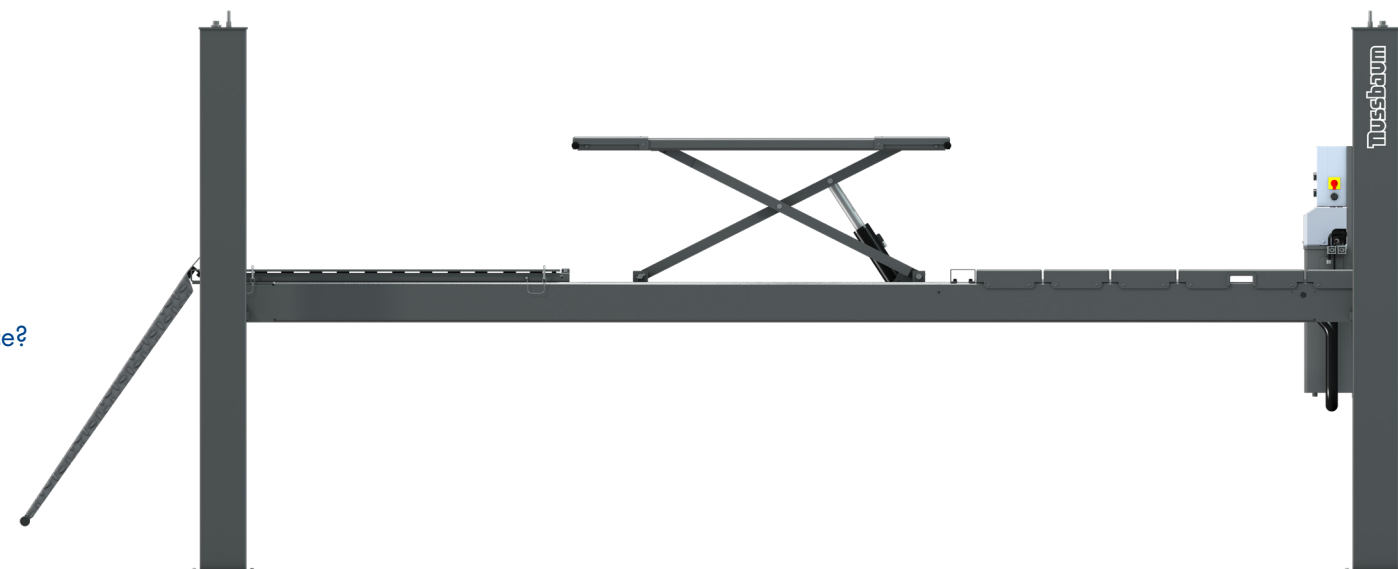

3 accessories that will help you get everything out of your COMBI LIFT

Our **axle jack** Jax 2600 and Jax 3200, or our Jax 4000 allow you to lift the vehicle wheel free at the axle.

Add our **lighting set** running along the whole runway, and your working comfort is complete.

We offer joint **play detectors** with integrated control buttons on the control torch for the COMBI LIFT 4.65 S.

Further accessories for wheel alignment are available.

Reliable

- ✓ Powered by one hydraulic cylinder
- ✓ High capacity power unit with a submerged motor installed on the control column
- ✓ Control panel with push-button operation
- ✓ High precision in every locking position, locking position every 100 mm
- ✓ Level runways (Versions: STANDARD, AMS, PLUS AMS)
- ✓ Roller bearing slip plates for wheel-alignment

FREE FLOOR

The absence of cables or connections under the lift allow for free movement and give you space for your equipment

PLUS

Runway with adjustable wheel free lift with patented HyperFlow® technology

AMS

Runway with wheel alignment set consisting of rear slide plates and front recesses for turntables

PLUS AMS

Runway with wheel-free lift and wheel alignment set


COMBI LIFT 4000, 6500 AND 8000: WE OFFER THE RIGHT CAPACITY FOR ANY WORKSHOP



COMBI LIFT STANDARD
standard with flat runway



COMBI LIFT PLUS
with wheel-free lift powered by hydraulic HyperFlow® technology

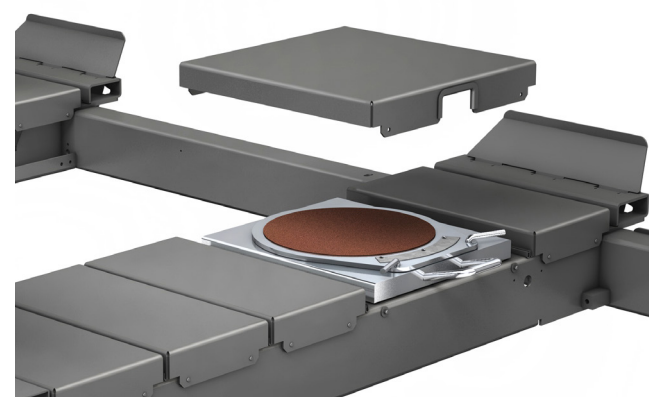

COMBI LIFT AMS
Runway with recesses for turntables in front and sliding plates in the back

YOUR BEST ALLY FOR WHEEL ALIGNMENT (AND EVERYTHING ELSE)

- Always precise
- Many options and accessories available
- Comes in 4 weight classes, from 4 to 8 tons



CHOOSE YOUR COMBI LIFT

COMBI LIFT	4.40 S	4.55 S	4.65 S	4.80 H
Lifting capacity (kg)	4500*	5500	6500	8000
Lifting / lowering time approx.(sec)	40 / 36	60 / 60	60 / 60	45 / 35
Lifting height (mm)	1996	2000	2000	2015
Lifting height (mm) Version AMS	2046	2050	2050	-
Runway length (mm)	4800	5756	5756	6000
Runway width (mm)	500	696	696	670
Distance between runways (mm)	834-984	478-928	478-928	800-1000
Drive-on height (mm)	180	184	184	217
Drive on height (mm) Version AMS	230	234	234	-
Drive on height (mm) Version PLUS AMS	230	234	234	-
Total height column (mm)	2162	2428	2428	2392
Total length (mm)	6100	6915	6915	7800
Power supply (V / Hz)	400 / 50	400 / 50	400 / 50	400 / 50
Motor (kW)	3	3	3	3

***Please note:** With the optional wheel free lift, the lifting capacity of COMBI LIFT 4.40 S is reduced to 4000 kg


WHEEL FREE LIFT (Version PLUS & PLUS AMS)

	4.40 S	4.55 S	4.65 S
Lifting capacity wheel free lift (kg)	3000	3500	3500
Lifting / lowering time wheel free lift (sec)	15 / 5	12 / 8	12 / 8
Lifting height wheel free lift (mm)	525	525	525
Platform length wheel free lift (mm)	1500-1900	1471-1951	1471-1951

ACCESSORIES




Jax 2600 / 3200 / 4000




Double sliding plate



Lighting 4 or 6 tubes LED



Adjustable runway distance



Play detector with remote control for the 4.65 S

**More accessories
available**